



The new PowerOx™ series of excavator buckets combine innovative design and advanced materials for the ultimate in job site productivity.

These buckets are constructed entirely of abrasion-resistant AR400 steel providing significant wear reduction and extending the life of the bucket while simultaneously reducing bucket weight to improve payload capacity. This combination is even more beneficial if you are using a coupler or thumb which add weight to the equation and reduce the amount of payload you can safely move.

PowerOx™ buckets allow you to tackle tough digging and material handling conditions with solid results. They maximize breakout force when directly pinned-on the machine and improve offset when used with a coupler. Additional enhancements in design and construction result in longer life, lower maintenance and improved digging cycle performance - especially in trenching applications.

NEW DESIGN

AR400 Steel
2.9X Stronger.
35% Lighter.



2.9X Stronger & 35% Lighter

AR400 steel construction reduces weight up to 35% and makes the bucket 2.9X stronger which means you can move even more payload with a coupler or thumb and handle rough jobs with ease.



Optimized Design

Reduces offset and maximizes machine geometry for better fill and dump cycle performance while supporting machines power allowing you to improve productivity.



Full Double Bottom Shell


Strengthens tub and increases wear life by protecting the side panel welds translating to lower maintenance and more uptime.



PALADIN™
POWERFUL ATTACHMENT TOOLS

820 Glaser Parkway, Akron, OH 44306 || PH: (800) 426.2538 || www.paladinattachments.com

PowerOx™ HD Excavator Buckets

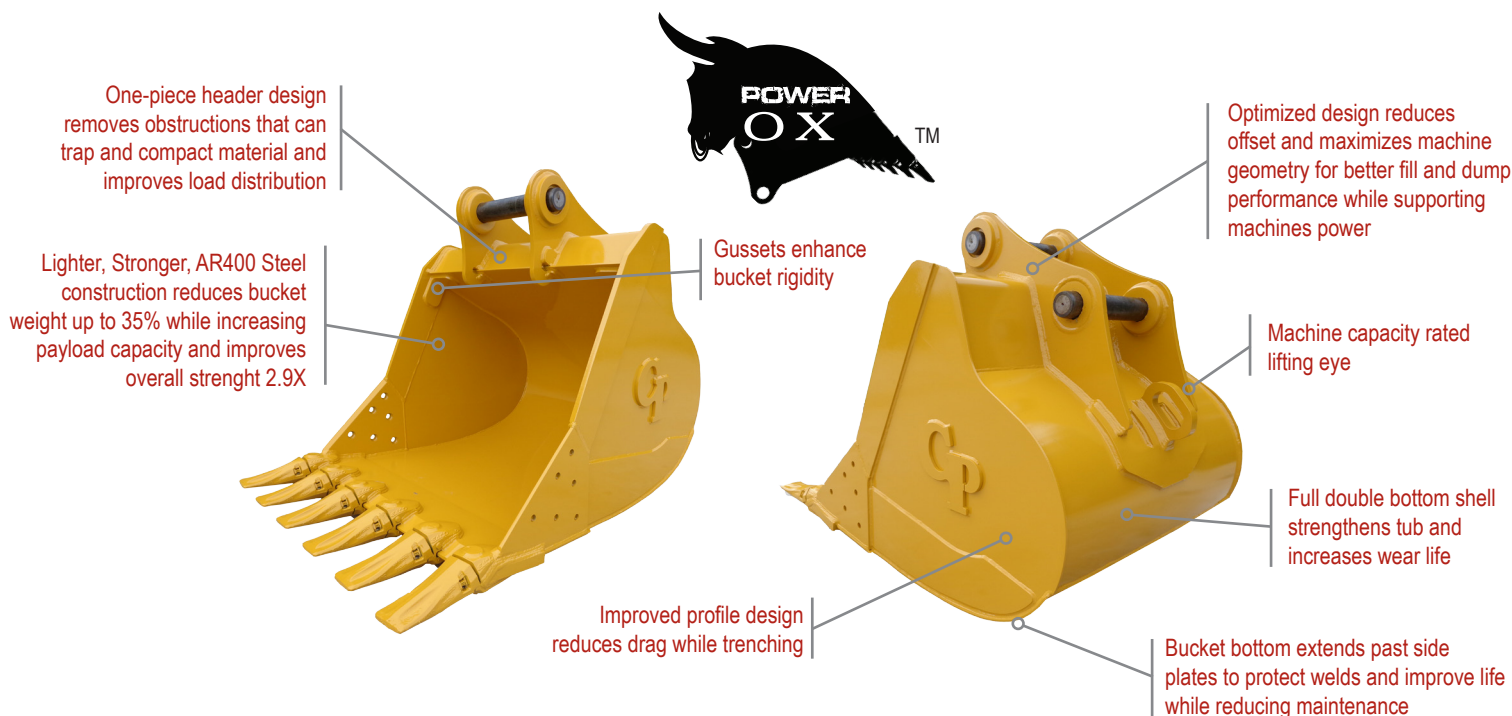

Range	Part Number	Width	Heaped Capacity	Weight
4	18HDR04*	18"	0.382 yd ³	683 lbs.
	24HDR04	24"	0.574 yd ³	765 lbs.
	30HDR04	30"	0.775 yd ³	873 lbs.
	36HDR04	36"	0.983 yd ³	984 lbs.
	42HDR04	42"	1.196 yd ³	1062 lbs.
	48HDR04	48"	1.412 yd ³	1160 lbs.
all standard edges are 1.25" x 10"				
* 18" may require design work and estimates				

Range	Part Number	Width	Heaped Capacity	Weight
5	18HDR05	18"	0.382 yd ³	699 lbs.
	24HDR05	24"	0.574 yd ³	818 lbs.
	30HDR05	30"	0.775 yd ³	931 lbs.
	36HDR05	36"	0.983 yd ³	1050 lbs.
	42HDR05	42"	1.196 yd ³	1133 lbs.
	48HDR05	48"	1.412 yd ³	1237 lbs.
all standard edges are 1.25" x 10"				
* 18" may require design work and estimates				

Range	Part Number	Width	Heaped Capacity	Weight
6	24HDR06	24"	0.642 yd ³	1023 lbs.
	30HDR06	30"	0.868 yd ³	1168 lbs.
	36HDR06	36"	1.104 yd ³	1320 lbs.
	42HDR06	42"	1.346 yd ³	1414 lbs.
	48HDR06	48"	1.593 yd ³	1539 lbs.
	54HDR06	54"	1.841 yd ³	1646 lbs.
all standard edges are 1.5" x 10"				

"The dig cycle improvements with the new PowerOx bucket are noticeable. We can feel the difference in trenching and love the heaping we get in this bucket."

