

BOXER® 525DX

Model Specifications

Engine System	US	Metric
Type	Kubota	Kubota
Cooling System	Liquid	Liquid
HP/kW	24.8 HP	18.6 kW
Fuel Type	Diesel	Diesel
Fuel Capacity	9 Gallons	34 Litres
Hydraulic Capacity	24 Gallons	91 Litres
Hydraulic Flow (Combined)	14.5 GPM	55 LPM
Hydraulic Flow (Aux)	11.2 GPM	42.5 LPM
Hydraulic Flow (Drive)	3.3 GPM	12.5 LPM
System Pressure	3000 PSI	20684 kPa
Engine Warranty	2 years	2 years
Product Warranty	1 year	1 year

Units	US	Metric
Track Gauge	33.75 in	857 mm
Track Width	9 in	230 mm
Weight (no attachment)	2670 lbs	1211 kg
Length (w/out Bucket)	77 in	1956 mm
Length (w/Bucket)	96 in	2438 mm
Width (Fully Retracted)	34.5 in	876 mm
Width (Fully Extended)	43.5 in	1105 mm
Height (Overall)	54 in	1372 mm
Height (Fully Raised)	98 in	2489 mm
Operating Capacity (35%)	735 lbs	333 kg
Tip Capacity	2100 lbs	952 kg
Hinge Pin Height (Fully Raised)	76 in	1930 mm
Dump Height	60 in	1524 mm
Dump Angle	37 Degrees	37 Degrees
Ground Clearance	5 inches	127 mm
Ground Speed	3.0 MPH	4.8 km/h
Ground Pressure	4.12 PSI	28.4 kPa

Model Features



2-Button Pressure Relief Block


1/4" thick (6 mm), Laser-Cut Base Sides

Universal Attachment Plate

2 1/2" Bore-welded Tilt Cylinder

(2) 2" (50mm) Bore-welded Lift Cylinders

3/4" Thick (19 mm) Boom Arms

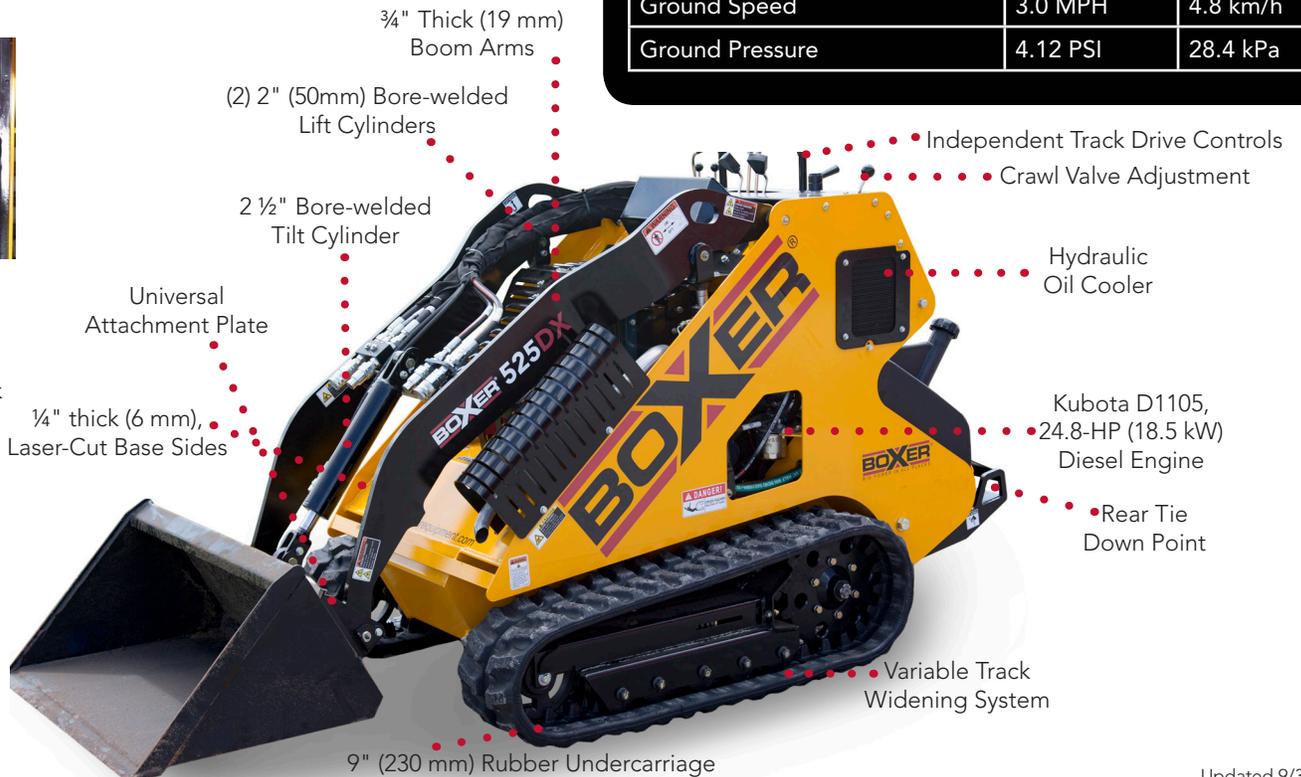

Independent Track Drive Controls
Crawl Valve Adjustment

Hydraulic Oil Cooler

Kubota D1105, 24.8-HP (18.5 kW) Diesel Engine

Rear Tie Down Point

Variable Track Widening System

9" (230 mm) Rubber Undercarriage

Updated 9/3/15